




Palisade – this spectrally selective, high visible light transmission product infused with ceramic is an exterior product that allows the maximum level of natural daylight to shine in. An excellent choice for installations where interior installations are not possible, safe for all types of glass. The low interior and exterior reflectance keeps your view uncompromised during the day or at night.

The soft neutral shade will blend beautifully with the look of any existing glass, either on the home or office. Palisade 75 EXT offers 40% in heat reduction, while still allowing 76% of visible light. Its soft, neutral color blends in well with any interior décor and provides natural outdoor views, while at the same time reducing extreme glare and excessive heat.

Our Palisade helps with one of the most annoying effects of sunlight – fading of interior furnishings. The combined rejection properties of this product result in a 56% slowing of interior fading.

- Protected with CST™ scratch-resistant hardcoat to ensure long lasting durability, protection and clarity.
- Blocks 99% of harmful UV rays - minimizing UV health risks to skin and eyes.
- 10% Glare reduction helps reduce eye strain and unwanted glare on computer screens, tablets and televisions.
- Comprehensive manufacturer's warranty available.

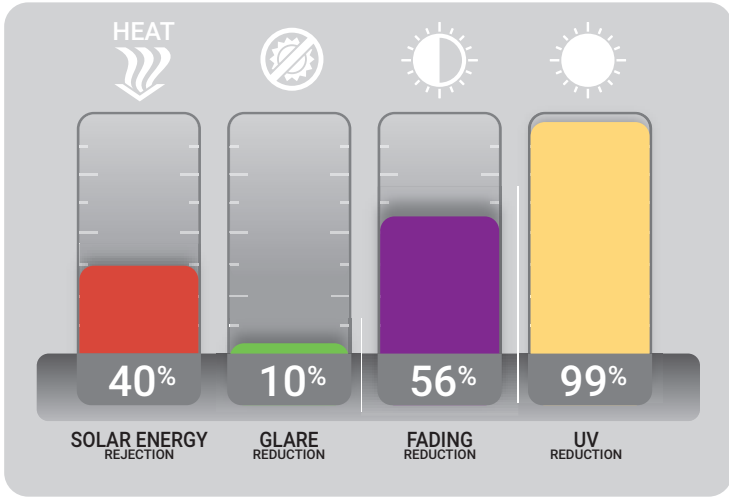


The Skin Cancer Foundation recommends Johnson Window Films products as effective UV protectants.




ABOUT WINDOW FILM

Window film acts as a “sunscreen” to block harmful UV rays, as it regulates the levels of heat and light passing through the glass. The amount of heat and light rejected is dependent upon the type of window film selected.

When applying our window film to glass, nearly 80% of solar energy is blocked. This creates a solar energy barrier by absorbing or reflecting a percentage of the solar energy being passed through the glass.

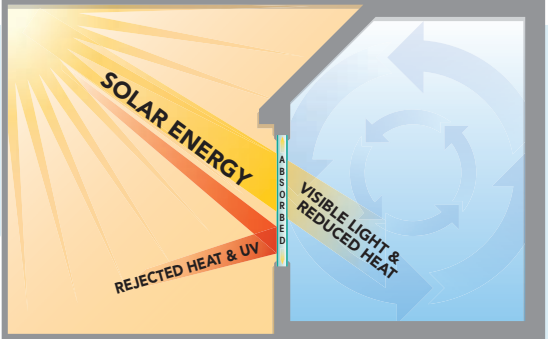


CAUSES OF FADING SOURCE: IWFA

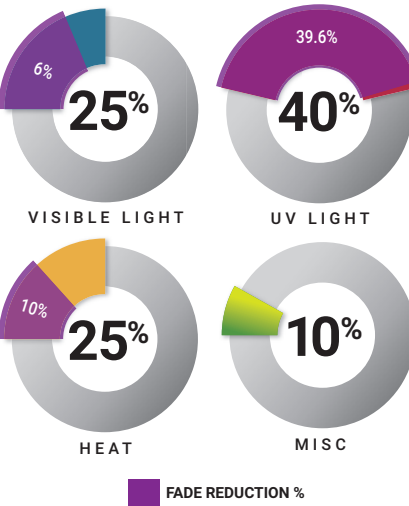

Window film does not completely eliminate interior fading, but it offers a reduction in the causes of fading. It reduces UV light, solar heat and visible light by blocking percentages of the causes. However, window film has no effect on items like dye fastness, age of fabrics and humidity, which is encompassed in the misc amount of 10% seen in the diagram.

PD75 EXT



Solar specifications represent film mounted to 1/8 inch (3mm) clear glass. Tests, equipment and methods are in accordance with ASTM, ANSI and NFRC standards. Calculations performed using Lawrence Berkeley Laboratory's Optics/Window 6. Values expressed hereof are typical and provided for comparative purposes only.

